

Road Blade™ Surface Mounted Directional Traffic Control

- Spring Loaded Operation
- Stainless steel torsion springs
- Latch Down Bars Included
- Surface Mounted Ramp is Low Profile (2")
- Powder Coated bright red for easy visibility/Teeth powder coated yellow - All surfaces are double coated
- Base Ramp Dimensions: 2"H x 22"W x 36"L. (Tooth height is 2") (123 lbs. each 3-foot section)
- End Cap Dimensions: 2"H x 22" W x 7" L (16.5 lbs. each cap)
- **Warning signs must be used with traffic spikes to warn drivers that a one-way traffic lane condition exists.**
- **Speed bumps should be used with traffic spikes. Speeds in excess of 5-MPH over the spikes can cause tire damage and create excessive wear on the spike system.**
- Purchase our snow melting stainless steel heater cable system for spikes in areas that are subject to freezing temperatures with potential of snow and ice accumulation.
- ¼" Thick Plate - Load Rated: 10 Tons or 20,000 lbs. per Single Axle Load




WARNING: Directional Traffic Spike Controllers are not intended to be used in areas where vehicular traffic is uncontrolled or crosses over the spikes at an angle other than 90°. Vehicle speed CAN NOT exceed 5 MPH. Speed Bumps and Warning Signs Must Be Used!

6' Speed Bump with 8 Cat Eye Reflectors and 3 Yellow Stripes



Road Blade™ MODEL RB-36

DIRECTIONAL TRAFFIC CONTROLLER

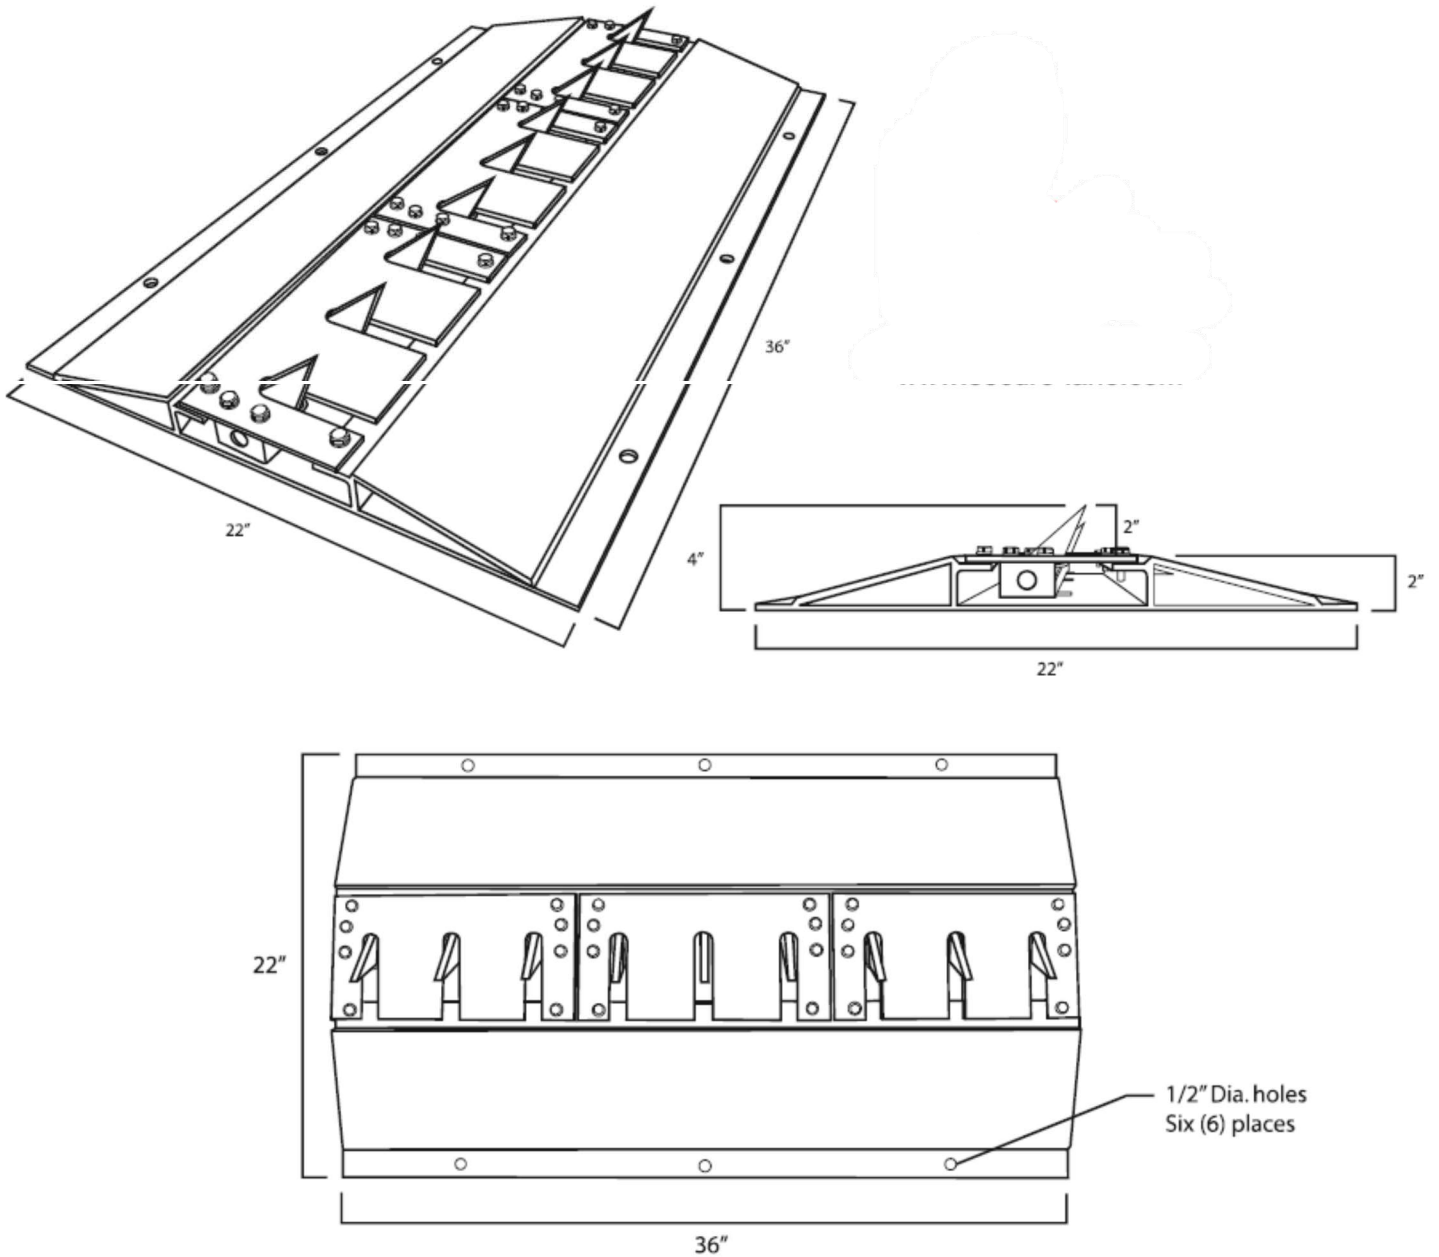

- Easily installed to the existing roadway. Bolt or Glue Down
- No excavating or asphalt cutting is required.
- Low profile for smooth passage.
- All welded construction.
- Latch Down Mechanism Included

Double Layer Powder Coat - Safety Red w/ PC Yellow Teeth

Powder Coating is highly resistant to corrosion, flaking, and scratching!